

motorcycle battery conventional range

ZPOWER











Never Says No.....

- Longer life cycle
- High cranking power
- Vibration resistance performance & good charging acceptance
- Low self discharge
- Consistant Performance quality
- Dry charge


Motorcycle (Conventional Range)

BATTERY SPECIFICATION

6 VOLT





Battery type	Capacity at 10 HR	Max over all Dimension - mm(+/- 2 mm)			Assembly figure as per cover polarity	Approx acid per battery	Regular charge current
	(AH)	L	W	H		Liter	AMP
6N4-2A	4	71	71	96		0.2	0.4
6N4-2A-2	4	71	71	96		0.2	0.4
6N4-2A-3	4	71	71	96		0.2	0.4
6N4-2A-4	4	71	71	96		0.2	0.4
6N4-2A-5	4	71	71	96		0.2	0.4
6N4-2A-6(8)	4	71	71	96		0.2	0.4
6N4-2A-7	4	71	71	96		0.2	0.4
6N6-3B	6	99	57	120		0.3	0.6
6N6-3B-1	6	99	57	111		0.3	0.6
6N11-2D	11	150	70	100		0.5	1.1

12 VOLT



Battery type	Capacity at 10 HR	Max over all Dimension - mm(+/- 2 mm)			Assembly figure as per cover polarity	Approx acid per battery	Regular charge current	CCA @ 0°F (-18°C)
	(AH)	L	W	H		Liter	AMP	
12N5-3B	5	120	60	130		0.4	0.5	39

12N-10-3B	10	135	60	145		0.8	1.0	103
-----------	----	-----	----	-----	---	-----	-----	-----

MULTIPOLE 12 VOLT

Battery type	Capacity at 10 HR	Max over all Dimension - mm(+/- 2 mm)			Assembly figure	Approx acid per battery	Regular charge current	CCA @ 0°F (-18°C)
	(AH)	L	W	H				
12N5.5-4B	5.5	135	60	130		0.4	0.6	60
12N-10-3A	10	135	90	145		0.8	1.0	103
12N14-3A	14	134	89	166		0.8	1.4	128
N20	20 (20 HR)	262	94	153		1.7	2	162


12 VOLT HIGH PERFORMANCE

Battery type	Capacity at 10 HR	Max over all Dimension - mm(+/- 2 mm)			Assembly figure	Approx acid per battery	Regular charge current	CCA @ 0°F (-18°C)
	(AH)	L	W	H				
NB2.5A-3C-1	2.5	80	70	105		0.24	0.3	19
NB2.5A-3C-2	2.5	80	70	105		0.24	0.3	19
NB2.5A-3C-3	2.5	80	70	105		0.24	0.3	19
NB3-3B	3	98	56	110		0.3	0.3	32
NB4-3B	4	120	70	92		0.3	0.4	56
NB5Z-3B	5	120	60	130		0.36	0.5	65
NB7B-4B	7	150	60	130		0.58	0.7	95
NB16CL-B	19	175	100	175		1.2	1.9	240

NB7Z-4A	8	146	76	135		0.6	0.8	113
---------	---	-----	----	-----	---	-----	-----	-----

Designation of battery model

6	N	2	A	-	2	C
12	N	5		-	3	B
	NB	2.5	A	-	3	C
	NB	5	Z	-	3	B
a	b	c	d		e	f

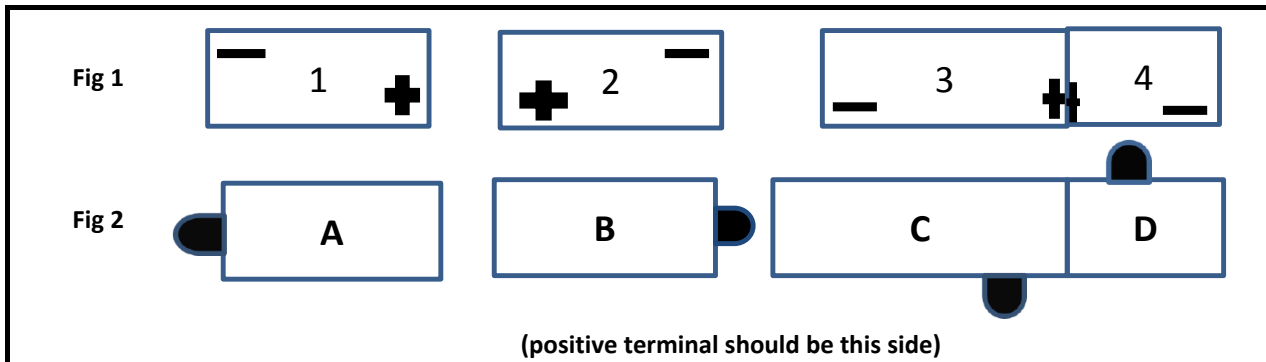

- a. Nominal voltage (No indication for NB series shows 12V)
- b. "N " shows standard. "NB" shows High performance batteries
- c. Ah at 10 hour rate.
- d. Indication of different size of the same capacity battery
- e. Polarity location (See Fig 1)
- f. Location of opening of exhause (see Fig 2)
- g. Type of terminal